WAVLINK
see the world

QUICK START GUIDE

USB-C Ultra 5K Universal Docking Station

WL-UG69DK1

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

Safety Instructions

Always read the safety instructions carefully.
Keep this Quick Start Guide for future reference.
Keep this equipment away from humidity.
If any of the following situation arises, get the equipment checked by a service technician:
• The equipment has been exposed to moisture.
• The equipment has been dropped and damaged.
• The equipment has obvious sign of breakage.
• The equipment has not been working well or you cannot get it work according to Quick Start Guide.

Copyright Statement

No part of this publication may be reproduced in any form by any means without the prior written permission.Other trademarks or brand names mentioned herein are trademarks or registered trademarks of their respective companies.

Disclaimer

Information in this document is subject to change without notice. The manufacturer does not make any representations or warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any commercial damage, including but not limited to special, incidental, consequential, or other damage.

WEEE Richtlinie und Produktentsorgung

Am Ende seiner Lebensdauer sollte dieses Produkt nicht als Hausmüll oder allgemeiner Abfall behandelt werden. Es sollte an die zuständige Sammelstelle für das Recycling von elektrischen und elektronischen Geräten übergeben oder zur Entsorgung an den Lieferanten zurückgesandt werden.

Introduction

The new USB Type-C connector works seamlessly with this Ultra HD 5K Universal Docking Station. It can connect to any host with Standard A or Type-C connectors providing a fully backward-compatible and future-proof docking solution. It allows you to connect up to two additional monitors and 14 accessories through a single USB cable. The latest driver is compatible with Windows 10, 8.1 and 7 or Apple Mac OS.

The USB-C Ultra 5K Universal Docking Station Software allows full configuration of all additional USB displays, including:

• Supports for up to 6 additional USB Displays (Windows)
• Supports for up to 4 additional USB Displays (Mac OS X)
• Expands USB 3.0 connectivity
• Supports dual DP or dual HDMI displays
• Gigabit Ethernet
• Mic In and Audio out
• Extended, Mirrored, Primary Display
• Extend left, right, above, or below
• Rotation

Features

- Compatible with both Type-C and Type-A Laptop/Desktop Computer
- Supports resolutions up to 5K(5120X 2880@60Hz)when connecting dual DP ports simultaneously to a 5K monitor
- Dual 4K HDMI/Dual 4K DisplayPort/4K HDMI+4K DisplayPort output
- Supports Extended and Mirrored Video Mode
- Supports 5.1 Channel Surround Sound through HDMI/DP ports
- Built-in USB 3.0 GPU, Plug and Display
- Separate microphone input and audio output
- SuperSpeed USB 3.0, speed up to 5Gbps and backward compatible with 2.0/1.1
- Built-in 10/100/1000 BASE-T RJ45 Gigabit Ethernet for increased network performance
- Incredible Connectivity
- Built-in six SuperSpeed USB 3.0 (up to 5Gbps) Type-A ports, backward compatible with 2.0/1.1
- Built-in one ON/OFF power switch

In the Box

Before installation, please check the items in the package. The package should contain the following items:
- 1 x USB-C Ultra 5K Universal Docking Station
- 1 x USB 3.1 C to C Cable
- 1 x USB 3.1 A to C Cable
- 1 x Quick Start Guide
- 1 x DC20V Certified Power Adapter

System Requirements

- Windows 7/8/8.1/10 or later
- Mac os 10.9 or later

Windows XP SP2 and Vista are supported by older versions of the DisplayLink software: http://www.displaylink.com/downloads

Application

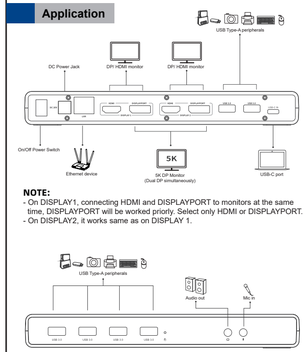

NOTE:
- On DISPLAY1, connecting HDMI and DISPLAYPORT to monitors at the same time, DISPLAYPORT will be worked priorly. Select only HDMI or DISPLAYPORT.
- On DISPLAY2, it works same as on DISPLAY 1.

Front Panel



Rear Panel



NOTE:
- On DISPLAY1, connecting HDMI and DISPLAYPORT to monitors at the same time, DISPLAYPORT will be worked priorly. Select only HDMI or DISPLAYPORT.
- On DISPLAY2, the content is same as on DISPLAY 1.

Driver Installation

Please visit either https://www.wavlink.com/en_us/drivers.html or https://www.displaylink.com/downloads to download the latest version of the driver and install it.

Configurations (Windows 10)

Audio Setting

1. From the taskbar, click the DisplayLink icon, then click **Audio Setup**.



2. Choose **Speaker**.

3. Choose **Microphone**.



Video Setting

1. From the taskbar, click the DisplayLink Icon, then click **Video Setup**.
2. Select **Display** and choose **Orientation** to select **Extend desktop to this display**.



4. Please wait patiently while Windows is configuring the DisplayLink Core Software. Your screen may temporarily go black or flash during this process.



5. When finished, the installation screen will disappear, and you will be returned to your desktop.

Note: On some computers, you may need to reboot before being able to use your USB-C dock.

Advanced Display Mode

1. From the taskbar, click the DisplayLink icon, then click **Video Setup**.
2. Select **Advanced Display Settings** and choose a recommended resolution.



Uninstalling the Driver

The uninstallation will be slightly different depending on your operating system.



Please take these steps to uninstall the Driver on Windows

1. From **Start Menu**, open **Control Panel**.
2. From the Programs item, click **Uninstall program**.
3. Double click on DisplayLink Core software. A Windows confirmation dialog opens (if nabled)
4. Click **Yes**.
5. A message may appear to state which software packages will also be uninstalled.Click **Yes** to uninstall the packages that use DisplayLink Core Software.The uninstaller automatically uninstalls the software.
6. Once uninstalled, you will be prompted to reboot. Click **Yes** to complete the uninstall.

Configurations (Mac OS X)

Introduction

This guide applies to software version 1.0 and above of the MAC software.

What is the Mac Driver?
The Mac driver is designed for Mac OS X 10.4 (Tiger), 10.5 (Leopard) and 10.6(Snow Leopard), 10.7.5(Lion) and 10.8.2(Mountain Lion) to enable you to add an additional monitor to your Mac by using DisplayLink technology.This software allows you to run your UGA devices on any Intel based desktop or laptop Mac, allowing you to connect up to 4 additional monitors via USB.

Please Note: Power PC-based Macintosh computers, such as late-model iMacs, PowerBooks and PowerMacs, are not currently supported.

Setup Guide

Installing/Uninstalling the MAC Driver

To run the MAC Installer, double-click the MAC DriverInstaller image: this will mount the MAC DriverInstaller.

Select **Software Installer** to begin installing the MAC Driver on your Mac. This will run a standard Mac installer and will require a restart once completed.

Select **User Guide** to view the User Guide.

Select **Software Uninstaller** to uninstall the MAC Driver from your Mac. This will require a restart once completed.

Connecting Displays to Your Mac

1. Please make sure you have installed the latest driver for your MAC.
2. Connect each display to the device.You can now connect up to 4 additional displays with an extra dock.

Example One:

1. Connect MacBook Pro to the powered dock.
2. Connect monitors to the dock via standard HDMI and DisplayPort cables.

Example Two:

1. Connect MacBook Air to the powered dock.
2. Connect a USB port (USB 3.0 port or USB-C port) of Dock 1 to the USB-C IN port of Dock 2 (not provided) via a USB cable (not provided).
3. Connect monitors to the dock via standard HDMI and DisplayPort cables.

Mac OS X Setting

1. Open **System Preferences**.

2. Click **Display** and configure it.



Thank you for purchasing WAVLINK product!

Official website: www.wavlink.com
Technical support: support@wavlink.com

UG69DK1-B说明书WAVLINK-E7
105G铜版纸，彩色印刷，双面印刷+折叠
成品尺寸：85*125mm
展开尺寸：680*125mm